NO	NOTES
1.	WIRING LEGEND: A — 1 — W — BL DISTANT TERMINATING AREA DISTANT TERMINAL DESIGNATION WIRE COLOR CODE
2.	COLOR CODE: BK — BLACK BR — BROWN R — RED O — ORANGE Y — YELLOW G — GREEN BL — BLUE P — PURPLE W — WHITE S — SLATE W — BK — WHITE — BLACK W — BR — WHITE — BROWN W — R — WHITE — RED W — O — WHITE — ORANGE W — Y — WHITE — YELLOW W — G — WHITE — GREEN W — BL — WHITE — BLUE W — P — WHITE — PURPLE W — S — WHITE — SLATE
4.	CONNECTOR VIEWED FROM SOLDER TERMINAL ENDS.
5.	ALL CONTACTS SHOWN IN UNOPERATED POSITION.
6.	SPARE TERMINAL OF U-18 RESERVED FOR POLAR OPERATION OF TRANSMITTER DISTRIBUTOR SIGNAL GENERATOR.
7.	DISCONNECT ONE TERMINAL WHEN TESTING SIGNAL GENERATOR.
8.	THE NUMBERS ENCASED BY PARENTHESES ARE USED FOR REFERENCE AND ARE NOT NECESSARILY SHOWN ON THE PARTS.
9.	A. 115 V ±10% AC POWER TO BE USED ON CLUTCH TRIP MAGNET ASSEMBLY CIRCUIT. (256M COIL ASSEMBLIES, 74Ω EACH) FOR DC OPERATION ADD SUFFICIENT EXTERNAL RESISTANCE TO LIMIT CURRENT TO 100 M.A. B. LXD27 EQUIPPED WITH 262M COIL ASSEMBLIES (RESISTANCE, 210Ω EACH) THE OPERATING CURRENT MUST BE 50 MA, 115 VDC WIRED AS SHOWN. FOR AC OPERATION CONNECT IN PARALLEL.
10.	GROUND STRAP 117366 OF LCXB SHOULD BE SECURED TO RIGHT REAR MTG. STUD OF LAAC RAIL (SEE SPEC. 5941S).

RTTY ELECTRONICS
TELETYPE=Sales-Service-Parts
PO Box 20101 El Sobrante, Ca.
94820. (510)222-3102
mr_rtty@pacbell.net

A
TRANSMITTER DISTRIBUTOR
SIGNAL GENERATOR

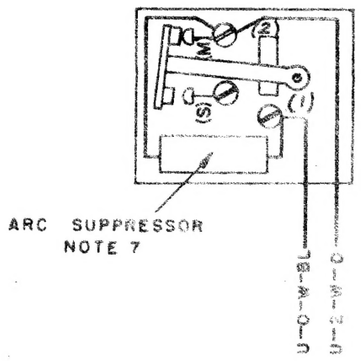

B
TRANSMITTER DISTRIBUTOR
CLUTCH MAGNETS

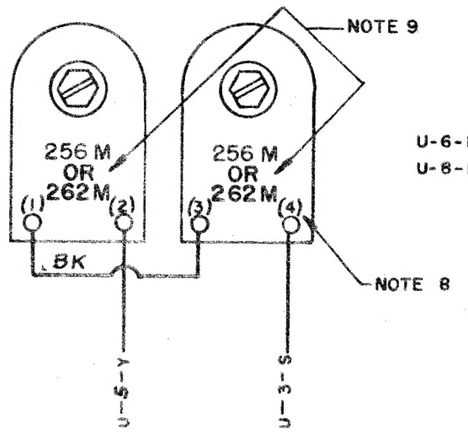

C
CONTROL LEVER
CONTACT ASSEMBLY



D
TAPE — OUT
CONTACT ASSEMBLY
(TAPE IN UNIT)



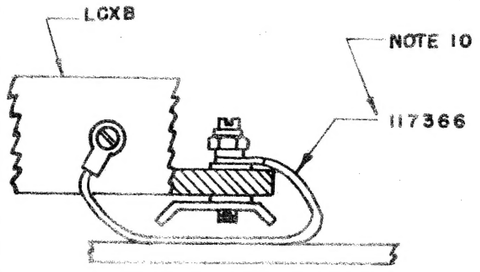

U
TRANSMITTER DISTRIBUTOR
CONNECTOR MALE

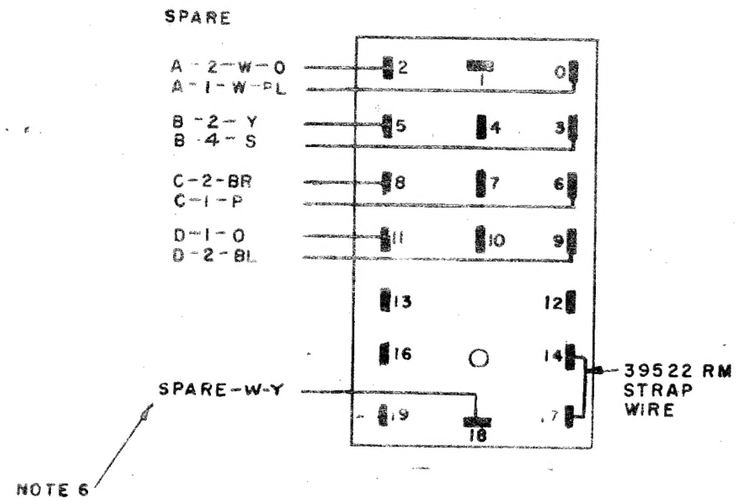

3300WD		
ISSUE	DATE	AUTH NO
A	8-22-57	TP-2263
B	3-25-58	28-8787
C	6-25-58	28-9401
D	1-6-59	28-10308
E	2-25-59	28-10771
F	7-29-60	28-13540
G	10-17-63	78376

ACTUAL
WIRING DIAGRAM
MODEL 28
TRANSMITTER
DISTRIBUTOR
LXD 3,27
ASR-GP

LESU 13, 14, 15, 16, 28, III

APPROVALS	
D AND R	E OF M
E-NUMBER	
PROD. NO.	
DATE: 5-13-57	
P.D. FILE NO. 2-58.65AA	
DRAWN. J.M.K.	CHKD
ENGD. KS	APPD

TELETYPE CORPORATION
3300WD